

FITTING INSTRUCTIONS



Rear Canvas Seat Covers.

1. Back rest fitting:

Remove all three head rests by pushing the button on the right hand side and use a pointy object to press the release button on left hand side.




2. Back rest fitting:

Place the canvas under the seat belt and slip the cover over the back rest. Please expose the release tab on top back rest (please see the attached image insert).



3. Back rest fitting:

Push the the front of the cover underneath the back rest taking care that the cover is fully stretched to the bottom.

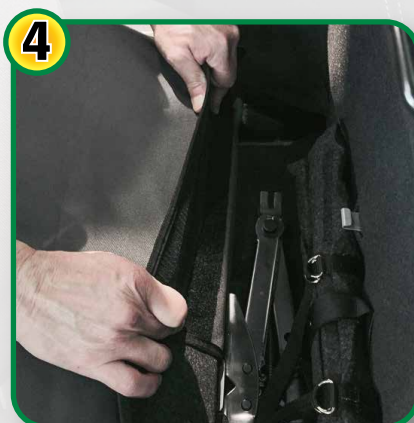

4. Back rest fitting: **IMPORTANT!**

Fold the back rest seat forward and attach the front velcro to the opposing rear velcro and fasten together.

5. Base (cushion) fitting:

Position the cover on the top of the base and roll it over the sides. Push the velcro between the base and back rest then lift the seat and attach velcros to the carpet underneath the base(see attached insert).



6. Finishing:

Refit the head rests and make sure that seat belts operate as it should.



7. Head rest fitting:

Position cover and slip over the head rest. Close the velcro flaps at the bottom of the cover.

BT508SW